


4"

4SR2 Series SUBMERSIBLE PUMPS



• Pump/Motor


- NEMA standard
- Q max: 4.5(m³/h)
- Insulation class: B
- Protection grade: IP 68
- Maximum diameter: ϕ 98mm
- Highest temperature of liquid: 35°C
- Options of different materials are available.

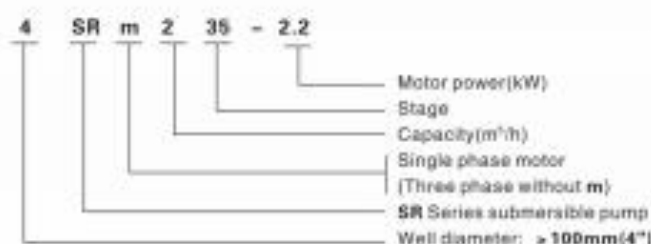

• PERFORMANCE TABLE:

rpm:2850 Outlet:G1"-1 1/4"

Type		Motor power		Capacity and head							Length (mm)
Single phase 220-240V - 50Hz	Three phase 380-415V - 50Hz	kW	HP	l/min m ³ /h	Head (m)						
					0	17	25	33	42	50	
4SRm205-0.25	4SR205-0.25	0.25	0.33	34	33	31	28	24	18	5	621
4SRm208-0.37	4SR208-0.37	0.37	0.5	54	53	50	45	38	29	6	717
4SRm211-0.55	4SR211-0.55	0.55	0.75	74	73	69	62	53	40	8	813
4SRm214-0.75	4SR214-0.75	0.75	1	96	93	87	78	67	50	10	910
4SRm219-1.1	4SR219-1.1	1.1	1.5	128	126	119	106	91	68	12	1120
4SRm225-1.5	4SR225-1.5	1.5	2	169	166	156	140	120	90	14	1318
4SRm230-2.2	4SR230-2.2	2.2	3	203	199	187	168	144	106	16	1501
4SRm235-2.2	4SR235-2.2	2.2	3	237	232	218	196	168	126	18	1717
4SRm240-3	4SR240-3	3	4	270	266	250	224	192	144	20	1917
—	4SR245-3	3	4	304	299	281	252	216	162	21	2082
—	4SR252-4	4	5.5	352	345	324	291	250	187	22	2328
—	4SR260-4	4	5.5	406	398	374	336	288	216	24	2531

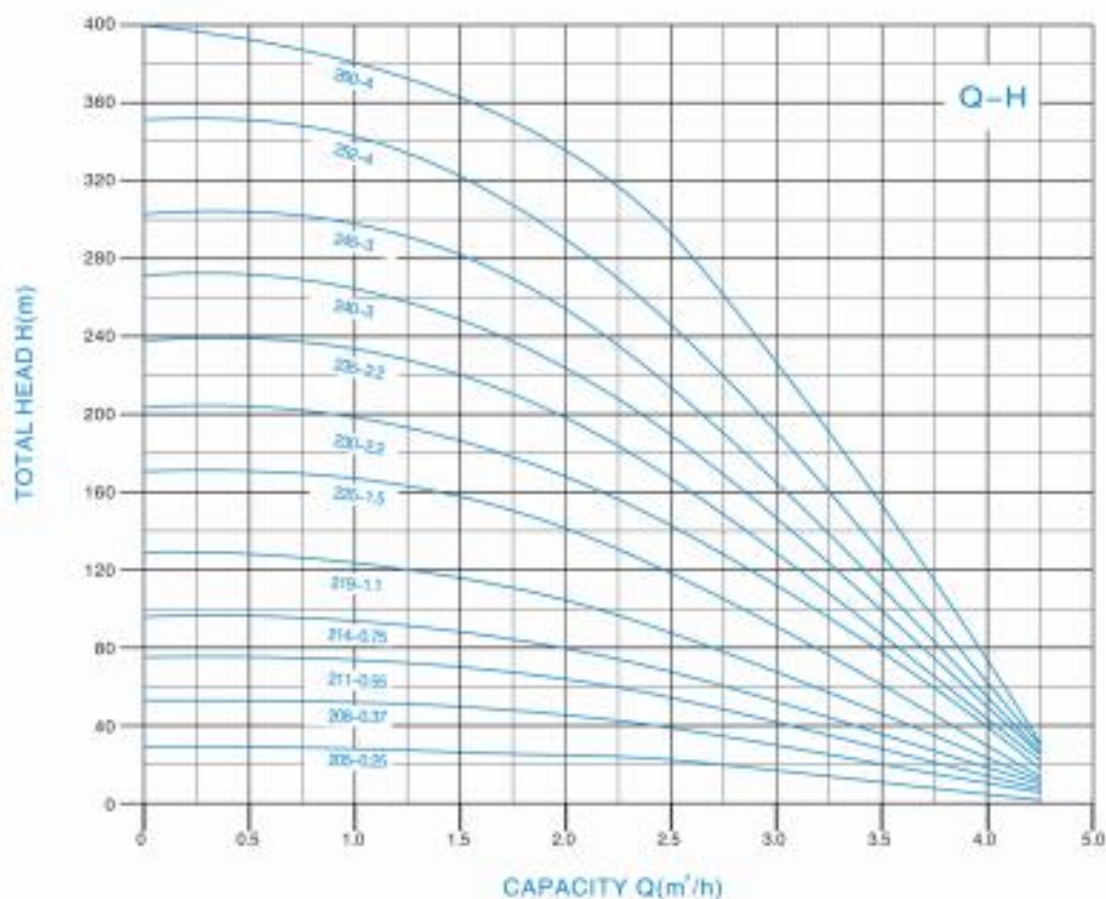


Series 4SR3 4" SUBMERSIBLE PUMPS



• Pump/Motor


- NEMA standard
- Q max: 5.8(m³/h)
- Insulation class: B
- Protection grade: IP 68
- Maximum diameter: ϕ 98mm
- Highest temperature of liquid: 35°C
- Options of different materials are available.

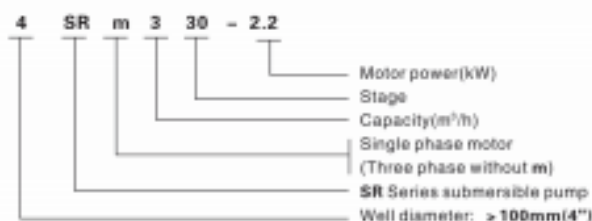

• PERFORMANCE TABLE:

rpm:2850 Outlet:G1 1/4" ~ 1 1/2"

Type		Motor power		Capacity and head								Length (mm)	
Single phase 220-240V ~ 50Hz	Three phase 380-415V ~ 50Hz	kW	HP	l/min m ³ /h	Head (m)								
					0	33	42	50	58	67	83		97
4SRm304-0.25	4SR304-0.25	0.25	0.33	30	25	23	20	18	13	4	2	611	
4SRm307-0.37	4SR307-0.37	0.37	0.5	53	44	40	35	32	22	6	2	720	
4SRm309-0.55	4SR309-0.55	0.55	0.75	68	56	51	45	41	29	8	3	799	
4SRm312-0.75	4SR312-0.75	0.75	1	90	75	68	60	55	38	10	5	907	
4SRm316-1.1	4SR316-1.1	1.1	1.5	120	100	91	80	73	51	12	7	1108	
4SRm321-1.5	4SR321-1.5	1.5	2	158	131	120	105	96	67	14	7	1301	
4SRm326-2.2	4SR326-2.2	2.2	3	195	163	148	130	119	83	16	8	1594	
4SRm330-2.2	4SR330-2.2	2.2	3	225	188	171	150	137	96	18	11	1712	
4SRm338-3	4SR338-3	3	4	285	238	217	190	173	122	20	13	1983	
—	4SR348-4	4	5.5	360	300	274	240	219	154	21	14	2378	
—	4SR355-5.5	5.5	7.5	413	344	314	275	251	176	22	15	2693	
—	4SR360-5.5	5.5	7.5	450	375	342	300	274	192	23	16	2879	

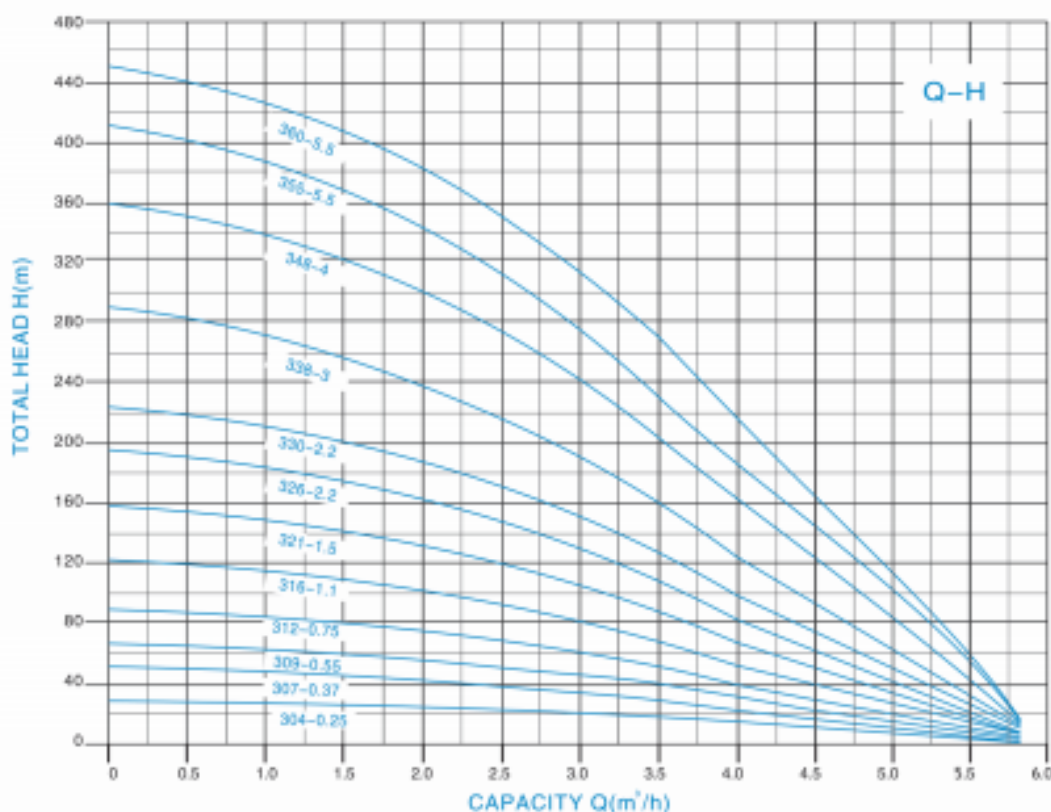


4"

4SR4 Series SUBMERSIBLE PUMPS



• Pump/Motor

NEMA standard
Q max: 8(m³/h)
Insulation class: B
Protection grade: IP 68
Maximum diameter: ϕ 98mm
Highest temperature of liquid: 35°C
 Options of different materials are available.

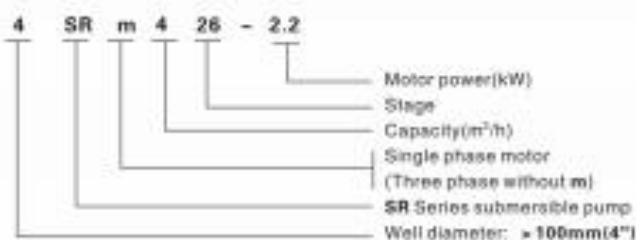


• PERFORMANCE TABLE:

rpm:2850

Outlet:G1 1/4" ~ 1 1/2"

Type		Motor power		Capacity and head													Length (mm)	
Single phase 220-240V ~ 50Hz	Three phase 380-415V ~ 50Hz	kW	HP	l/min m ³ /h	Head (m)													
					0	17	33	50	58	67	75	83	100	117	133			
4SRm403-0.25	4SR403-0.25	0.25	0.33	20	19	18	17	15	15	14	13	10	6	1	588			
4SRm405-0.37	4SR405-0.37	0.37	0.5	33	33	31	29	27	26	25	21	17	11	1	668			
4SRm408-0.55	4SR408-0.55	0.55	0.75	52	52	50	45	44	40	38	34	25	17	1	779			
4SRm410-0.75	4SR410-0.75	0.75	1	65	65	61	56	54	51	47	43	33	20	1	859			
4SRm414-1.1	4SR414-1.1	1.1	1.5	93	92	84	78	76	71	66	60	45	28	3	1064			
4SRm419-1.5	4SR419-1.5	1.5	2	126	126	120	110	105	99	93	84	66	43	5	1259			
4SRm426-2.2	4SR426-2.2	2.2	3	170	170	160	147	139	132	121	111	85	53	6	1617			
4SRm434-3	4SR434-3	3	4	224	224	210	193	184	173	161	147	114	73	8	1895			
—	4SR444-4	4	5.5	296	297	281	262	251	239	222	205	163	110	10	2299			
—	4SR454-5.5	5.5	7.5	338	328	305	282	270	247	229	211	162	120	12	2749			

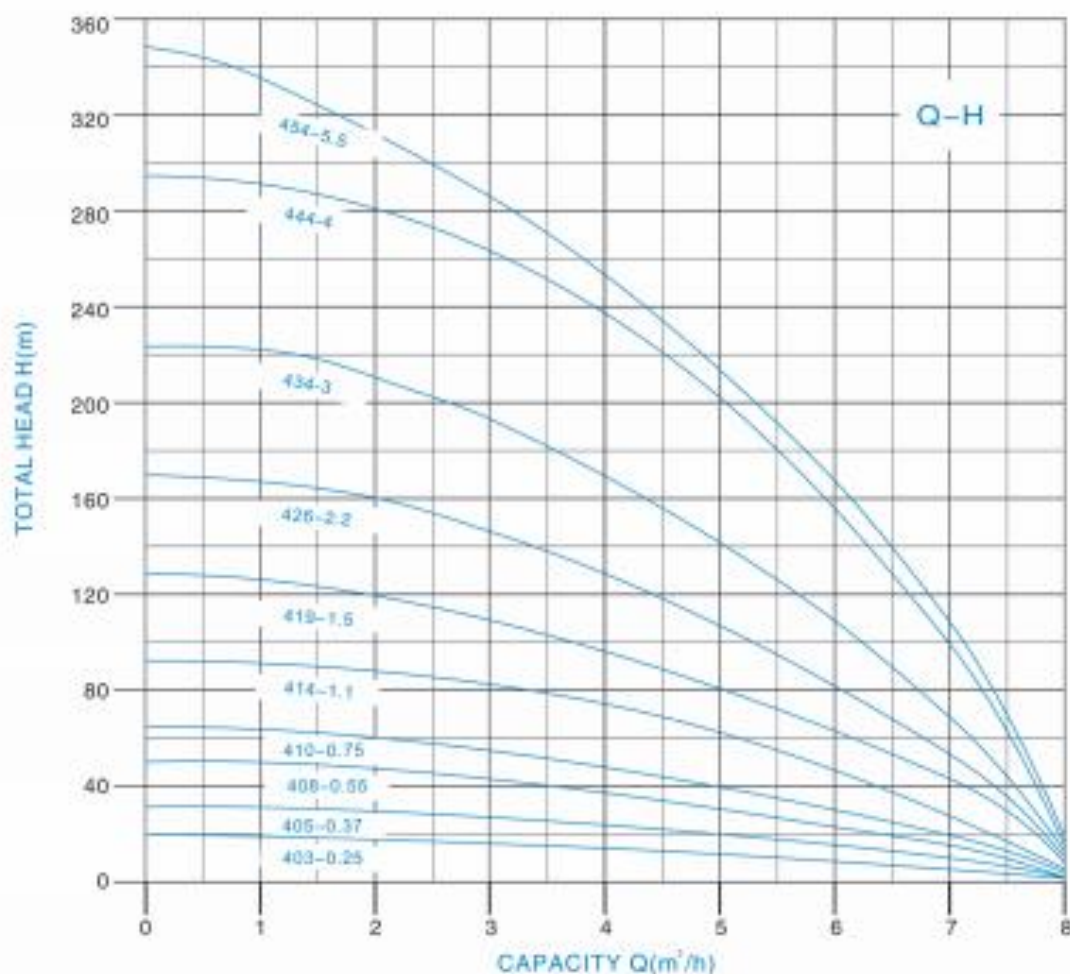

Series SUBMERSIBLE PUMPS


4SR5

4"



● Pump/Motor

- NEMA standard
- Q max: 9(m³/h)
- Insulation class: B
- Protection grade: IP 68
- Maximum diameter: \varnothing 98mm
- Highest temperature of liquid: 35°C
- Options of different materials are available.

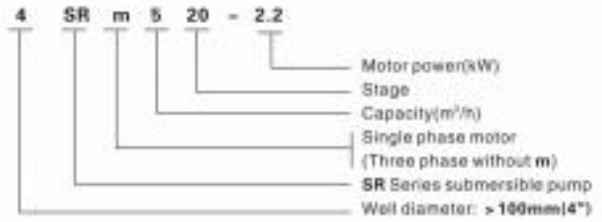


● PERFORMANCE TABLE:

rpm:2850

Outlet:G1 1/4" ~ 1 1/2"

Type		Motor power		Capacity and head							Length (mm)
Single phase 220-240V - 50Hz	Three phase 380-415V - 50Hz	kW	HP	l/min m³/h	Head (m)						
					0	50	67	83	100	133	
4SRm508-0.55	4SR508-0.55	0.55	0.75	38	37	35	30	28	11	6	736
4SRm508-0.75	4SR508-0.75	0.75	1	51	49	46	40	35	14	7	823
4SRm511-1.1	4SR511-1.1	1.1	1.5	70	67	64	55	48	20	8	1007
4SRm514-1.5	4SR514-1.5	1.5	2	90	85	81	70	62	25	9	1152
4SRm520-2.2	4SR520-2.2	2.2	3	128	122	116	100	88	36	11	1499
4SRm526-3	4SR526-3	3	4	166	159	151	130	114	47	12	1700
—	4SR532-4	4	5.5	205	195	186	160	141	58	13	2004
—	4SR540-5.5	5.5	7.5	256	244	232	200	176	72	14	2381
—	4SR545-5.5	5.5	7.5	288	275	261	225	198	81	16	2587

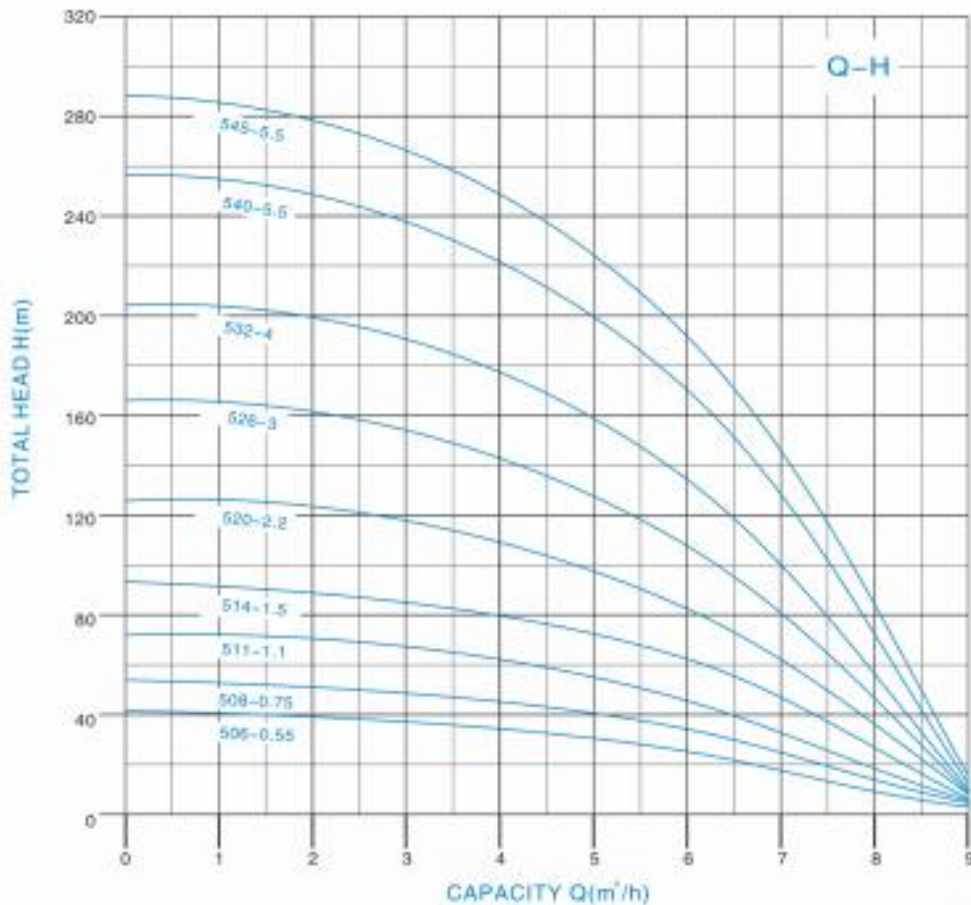


4"

4SR8 Series SUBMERSIBLE PUMPS



• Pump/Motor


NEMA standard
 Q max: 14.7(m³/h)
 Insulation class: B
 Protection grade: IP 68
 Maximum diameter: ϕ 98mm
 Highest temperature of liquid: 35°C
 Options of different materials are available.

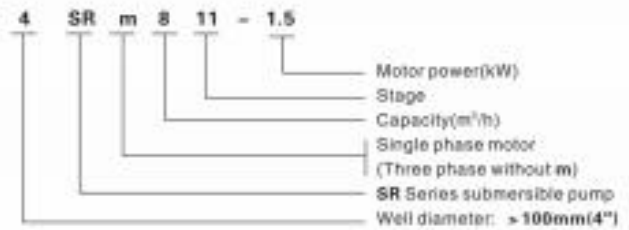

• PERFORMANCE TABLE:

rpm:2850 Outlet:G1½" ~ 2"

Type		Motor power		Capacity and head											Length (mm)
Single phase 220~240V ~ 50Hz	Three phase 380~415V ~ 50Hz	kW	HP	U/min m ³ /h	0	33	67	100	117	133	150	167	200	245	
				Head (m)	0	2	4	6	7	8	9	10	12	14.7	
4SRm805-0.55	4SR805-0.55	0.55	0.75		28	26	25	24	22	20	19	16	10	4	744
4SRm807-0.75	4SR807-0.75	0.75	1	39	37	36	33	31	28	26	22	13	6	843	
4SRm809-1.1	4SR809-1.1	1.1	1.5	50	48	46	42	40	36	34	28	17	8	970	
4SRm811-1.5	4SR811-1.5	1.5	2	62	58	56	52	49	44	41	35	21	9	1096	
4SRm814-2.2	4SR814-2.2	2.2	3	78	74	72	66	63	58	53	44	27	10	1362	
4SRm816-2.2	4SR816-2.2	2.2	3	90	84	82	76	72	64	60	50	31	11	1442	
4SRm820-3	4SR820-3	3	4	112	106	102	94	90	80	75	63	38	12	1637	
—	4SR824-4	4	5.5	134	127	123	113	108	96	90	76	46	14	1861	
—	4SR828-5.5	5.5	7.5	157	148	143	132	125	112	106	88	54	15	2130	
—	4SR832-5.5	5.5	7.5	179	169	164	151	143	128	120	101	61	16	2328	
—	4SR836-7.5	7.5	10	202	190	184	170	161	144	135	113	69	17	2688	
—	4SR840-7.5	7.5	10	224	211	205	189	179	160	150	126	77	18	2847	

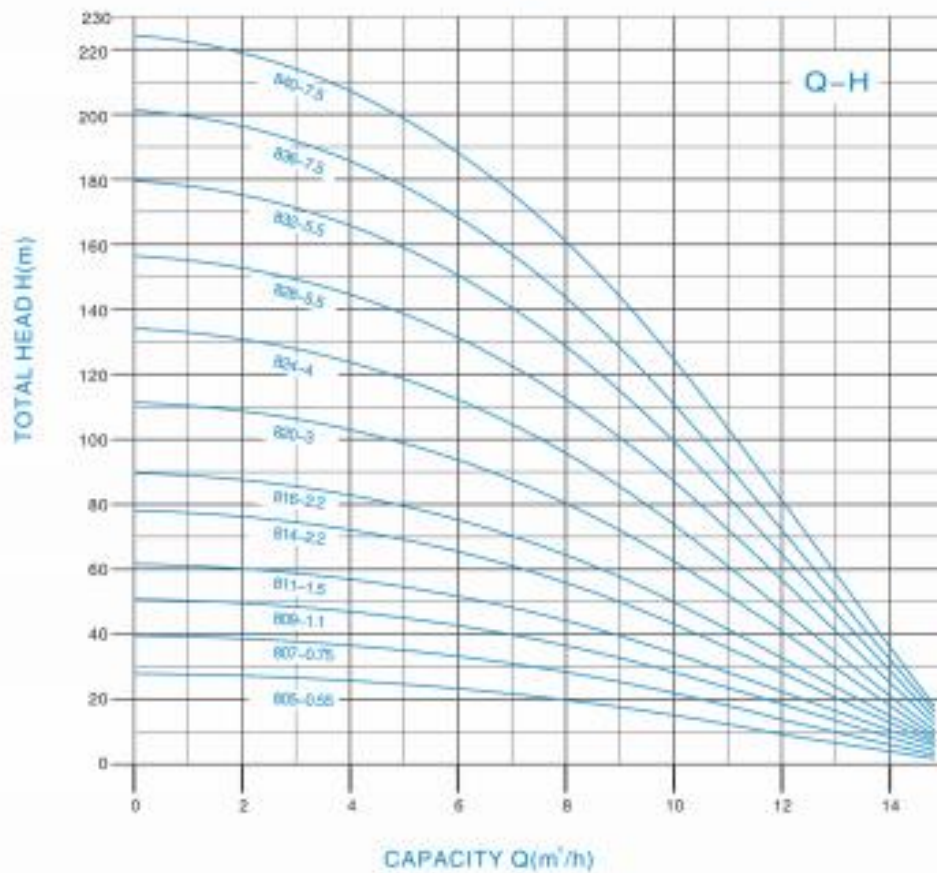


Series SUBMERSIBLE PUMPS 4SR10

4"



• Pump/Motor


- NEMA standard
- Q max: 16.5(m³/h)
- Insulation class: B
- Protection grade: IP 68
- Maximum diameter: ϕ 98mm
- Highest temperature of liquid: 35°C
- Options of different materials are available.

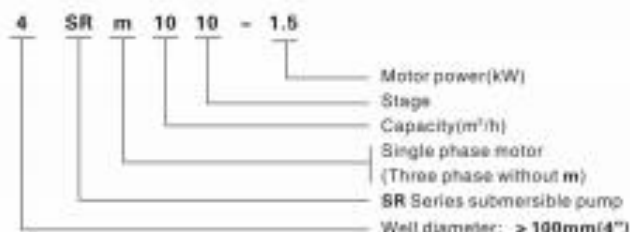

• PERFORMANCE TABLE:

rpm:2850 Outlet:G 2"

Type		Motor power		Capacity and head												Length (mm)
Single phase 220-240V - 50Hz	Three phase 380-415V - 50Hz	kW	HP	l/min	0	67	100	133	150	167	183	200	233	275		
				m ³ /h	0	4	6	8	9	10	11	12	14	16.5		
4SRm1004-0.55	4SR1004-0.55	0.55	0.75	Head (m)	24	22	20	18	16	15	14	12	8	4	775	
4SRm1006-0.75	4SR1006-0.75	0.75	1		36	33	31	28	25	23	22	18	12	6	892	
4SRm1008-1.1	4SR1008-1.1	1.1	1.5		48	44	41	37	33	31	29	24	16	8	1037	
4SRm1010-1.5	4SR1010-1.5	1.5	2		60	55	51	46	41	39	36	30	20	9	1175	
4SRm1012-2.2	4SR1012-2.2	2.2	3		72	66	61	55	49	46	43	36	24	10	1417	
4SRm1014-2.2	4SR1014-2.2	2.2	3		84	77	71	65	57	54	50	42	28	12	1528	
4SRm1017-3	4SR1017-3	3	4		102	94	87	78	70	65	61	51	34	13	1674	
—	4SR1021-4	4	5.5		126	116	107	97	86	81	76	63	42	14	1982	
—	4SR1025-5.5	5.5	7.5		150	138	128	115	103	96	90	75	50	15	2287	
—	4SR1028-5.5	5.5	7.5		168	157	143	129	115	108	101	84	56	16	2433	
—	4SR1032-7.5	7.5	10		192	177	163	148	131	123	115	96	64	17	2875	
—	4SR1036-7.5	7.5	10		216	199	184	166	148	139	130	108	72	18	3070	

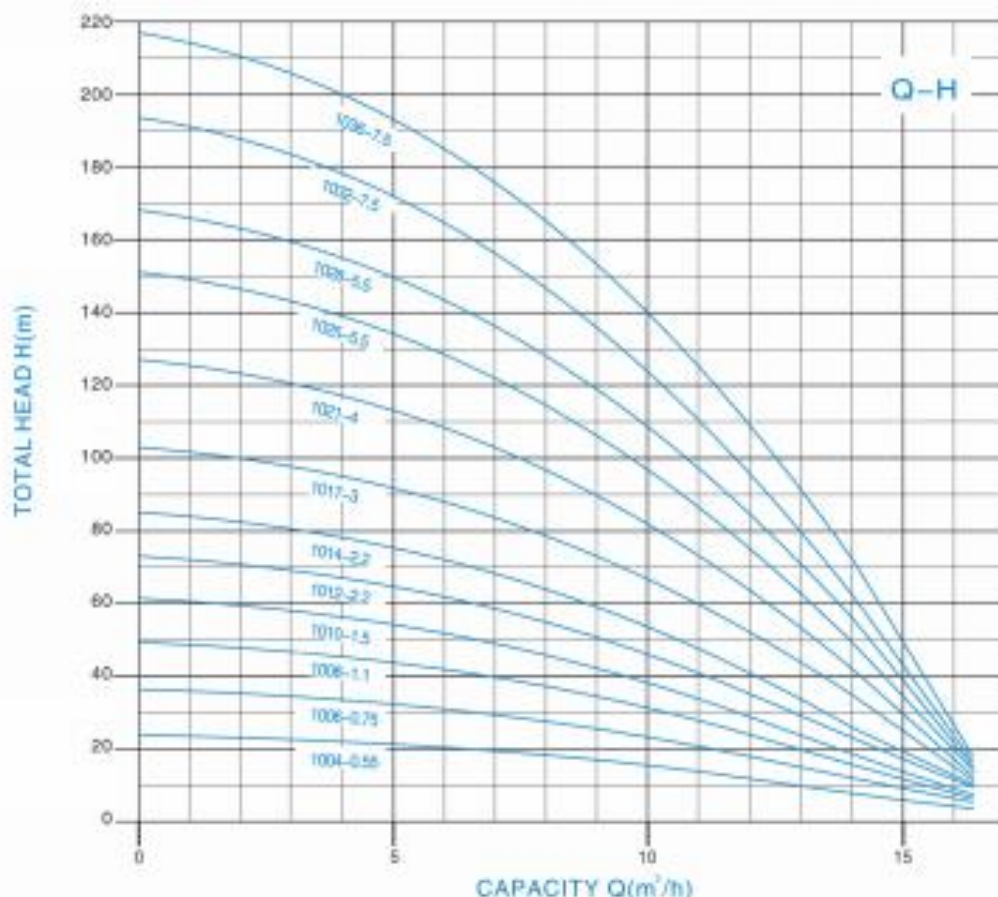


4"

4SR12 Series SUBMERSIBLE PUMPS



• Pump/Motor

- NEMA standard
- Q max: 15.7(m³/h)
- Insulation class: B
- Protection grade: IP 68
- Maximum diameter: ϕ 98mm
- Highest temperature of liquid: 35°C
- Options of different materials are available.

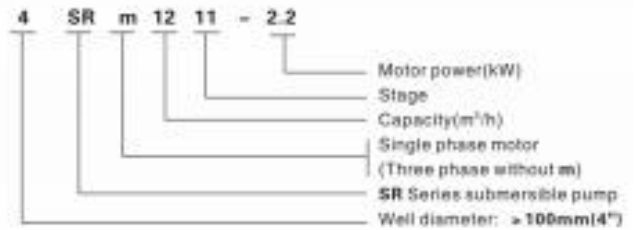


• PERFORMANCE TABLE:

rpm:2850

Outlet:G 2"

Type		Motor power		Capacity and head												Length (mm)
Single phase 220-240V - 50Hz	Three phase 380-415V - 50Hz	kW	HP	l/min m ³ /h	0	83	100	133	167	200	217	233	250	262		
					0	5	6	8	10	12	13	14	15	15.7		
4SRm1204-0.75	4SR1204-0.75	0.75	1	Head (m)	27	25	24	23	20	15	12	9	5	4	739	
4SRm1206-1.1	4SR1206-1.1	1.1	1.5		40	37	36	34	29	22	18	13	7	6	856	
4SRm1208-1.5	4SR1208-1.5	1.5	2		53	49	48	45	39	30	24	17	9	7	973	
4SRm1211-2.2	4SR1211-2.2	2.2	3		73	68	67	62	54	41	33	24	13	8	1187	
4SRm1214-3	4SR1214-3	3	4		93	86	85	79	68	52	42	30	17	9	1295	
—	4SR1217-4	4	5.5		113	105	103	96	83	63	51	36	20	11	1467	
—	4SR1220-5.5	5.5	7.5		133	123	121	113	98	74	60	43	24	12	1685	
—	4SR1222-5.5	5.5	7.5		146	136	133	124	107	81	66	47	26	13	1757	
—	4SR1226-7.5	7.5	10		172	160	158	147	127	96	77	56	31	15	2101	
—	4SR1228-7.5	7.5	10		186	173	170	158	137	103	83	60	33	16	2173	

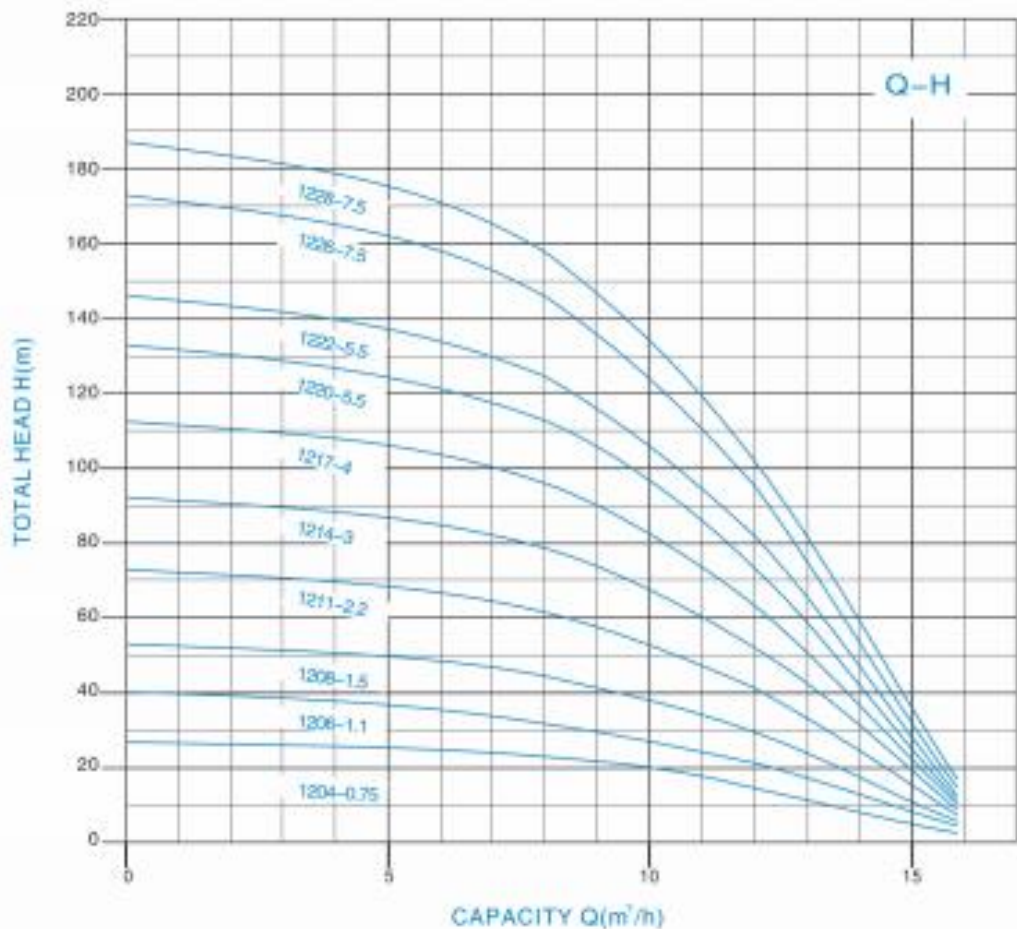

Series SUBMERSIBLE PUMPS


4SR16

4"



• Pump/Motor

- NEMA standard
- Q max: 24(m³/h)
- Insulation class: B
- Protection grade: IP 68
- Maximum diameter: ϕ 98mm
- Highest temperature of liquid: 35°C
- Options of different materials are available.

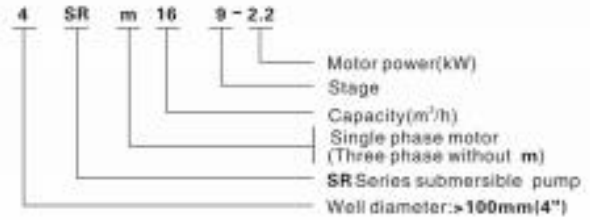

• PERFORMANCE TABLE:

rpm: 2850

Outlet: G2"

Type		Motor power		Capacity and head											Length (mm)
Single phase 220-240V- 50Hz	Three phase 380-415V- 50Hz	kW	HP	l/min m ³ /h	Head (m)								Length (mm)		
					0	100	167	233	250	267	300	400	0	400	
4SRm1604-1.1	4SR1604-1.1	1.1	1.5	23	20	17	13	12	11	9	0	423			
4SRm1606-1.5	4SR1606-1.5	1.5	2	34	31	26	21	20	18	15	0	486			
4SRm1609-2.2	4SR1609-2.2	2.2	3	50	45	39	32	31	30	25	3	548			
4SRm1612-3	4SR1612-3	3	4	67	60	54	44	42	40	35	13	694			
—	4SR1616-4	4	5.5	89	81	71	60	57	54	48	14	820			
—	4SR1620-5.5	5.5	7.5	112	103	93	79	75	71	64	29	1059			
—	4SR1625-7.5	7.5	10	142	130	118	99	94	90	80	41	1185			

